




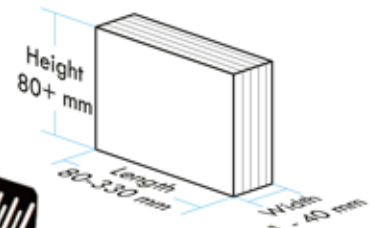

**Book size**

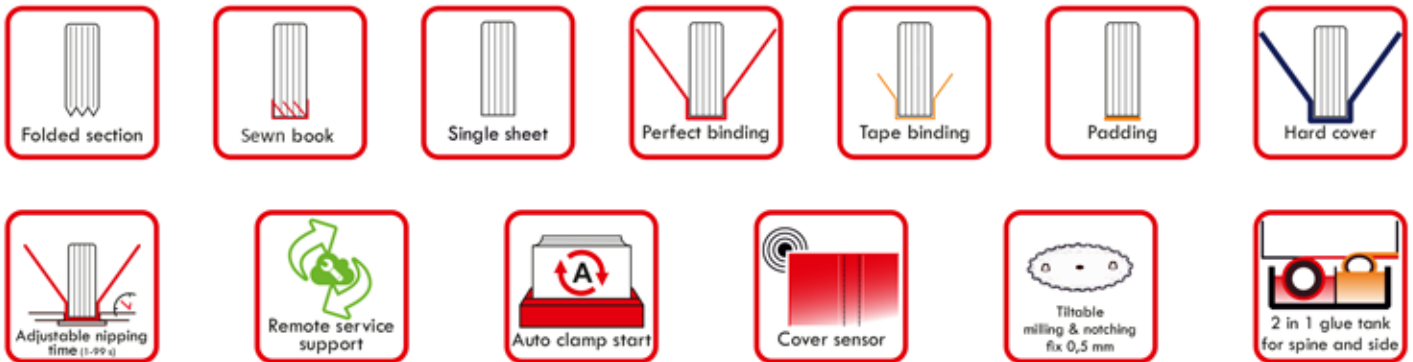

**Cover size**

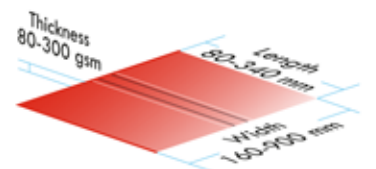

**Standard features:**

- x 2 in 1 tank for spine and sidegluing
- x Sidegluing applied by ribbed disks
- x Adjustable glue cut-off from the touch screen
- x Fix milling depth (0.5 mm) and notching
- x Tilttable milling unit
- x Paper dust extractor
- x Adjustable book positioning from the touch screen (max. 10 mm)
- x Cover sensor
- x Large cover holder, with skew adjustment
- x Automatic carriage start
- x 1~230V

**Available options for this model:**

- x Magnetic bookblock support
- x Glue fume extractor
- x Sideshelf
- x Tape binding
- x Direct hardcover binding, with adjustable nipping height

Specifications	LAMIBIND 2000 EVA
Dimensions of the machine (l x w x h mm)	1400x825x1057
Package of the machine (l x w x h mm)	1600x1025x1300
Net weight (kg)	300
Gross weight (kg)	340
Power supply (elective)	1~230 V-50 Hz / 200-220 V-60 Hz / 100-120 V 60Hz
Nominal current (A)	12 / 14 / 25
Capacity (kW)	3
Compressed air supply (bar)	Not necessary
Length of the bound document (mm/inch)	80-340
Thickness of the bound document (mm/inch)	1-40
Theoretical number of working cycles (fwd-bwd/hour) * The above value is theoretical number of the working cycles. The real speed and quantity of books can be bound on the machine depends on the strenght features of the flue used on the machine, the necessary binding/nipping time, the thickness of the document to be bound, deoends on the skill and quickness of the machine operator, and the selected binding technology.	290*
Adjustment of the binding time of the document	1-99
Binding cycle counter	Yes
Automatic start of the carriage clamp	Yes
<b>Milling unit</b>	
Spine preparation	Fixed Milling & Notching
Possibility to switch off the milling unit	Yes
<b>Gluing unit</b>	
Heat-up time (minute)	20-25
Temperature range of the melting of the glue (C/F)	100-200
Volume of the glue container	2 kg
Possibility to use different type of spine and side glue & side gluing rollers	Yes
Adjustable length regulation of the glue application (Glue cut off)	Yes
Standby mode	Yes
<b>Binding unit</b>	
Possibility to adjust the position of the book block over the binding unit	Yes
Cover sensor	Yes
<b>Other Functions</b>	
Paper dust extraction	Yes
User Interface	Colour Touch Screen
Operating software	RIGO
Software update	Yes
Online remote control	Yes
<b>Options</b>	
Tape binding	Option
Magnetic book holder	Option
Glue fume extractor unit	Option
Large cover holder	Option
Side shelf	Option



AfterPrint Ltd  
 Unit F, Hoyle Point, Hoyle Street  
 Warrington, WA5 0LW  
 Hello@AfterprintLtd.co.uk  
 www.AfterPrintLtd.co.uk  
 01925 611560

