


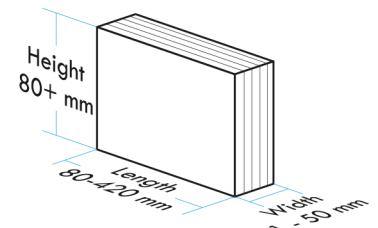






Book size



Cover size

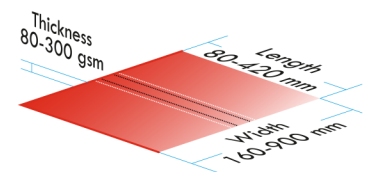

Standard features:

- x 2 in 1 tank for spine and sidegluing
- x Sidegluing applied by ribbed disks
- x Fix milling depth (0.5 mm) and notching
- x Paper dust extractor
- x Adjustable book positioning from the touch screen (max. 10 mm)
- x Cover sensor
- x Large cover holder, with skew adjustment
- x 1~230V

Available options for this model:

- x Magnetic bookblock support
- x Glue fume extractor
- x Sideshelf
- x Tape binding
- x Tiltable milling unit
- x Automatic carriage start
- x Remote service support, Industry 4.0 ready

Specifications	LAMIBIND 420 HM
Dimensions of the machine (l x w x h mm)	1830x1050x1190
Package of the machine (l x w x h mm)	2030x1250x1390
Net weight (kg)	450
Gross weight (kg)	500
Power supply (elective)	1~230 V-50 Hz / 200-220 V-60 Hz / 100-120 V 60Hz
Nominal current (A)	12 / 14 / 25
Capacity (kW)	3
Compressed air supply (bar)	Not necessary
Length of the bound document (mm/inch)	80-420
Thickness of the bound document (mm/inch)	1-50
Theoretical number of working cycles (fwd-bwd/hour) * The above value is theoretical number of the working cycles. The real speed and quantity of books can be bound on the machine depends on the strength features of the glue used on the machine, the necessary binding/nipping time, the thickness of the document to be bound, depends on the skill and quickness of the machine operator, and the selected binding technology.	450*
Adjustment of the binding time of the document	1-99
Binding cycle counter	Yes
Milling unit	
Spine preparation	Fixed Milling & Notching
Gluing unit	
Heat-up time (minute)	20-25
Temperature range of the melting of the glue (C/F)	100-200
Volume of the glue container	2 kg
Possibility to use different type of spine and side glue & side gluing rollers	Yes
Standby mode	Yes
Binding unit	
Possibility to adjust the position of the book block over the binding unit	Yes
Cover sensor	Yes
Other Functions	
Paper dust extraction	Yes
User Interface	Touch Screen
Operating software	RIGO
Software update	Yes
Online remote control	Yes
Options	
Automatic start of the carriage clamp	Option
Binding unit height adjustment & hard cover set	Option
Tape binding	Option
Magnetic book holder	Option
Glue fume extractor unit	Option
Possibility to switch off the milling unit	Option
Adjustable length regulation of the glue application (Glue cut off)	Option
Large cover holder	Option
Side shelf	Option



AfterPrint Ltd
 Unit F, Hoyle Point, Hoyle Street
 Warrington, WA5 0LW
 Hello@AfterprintLtd.co.uk
 www.AfterPrintLtd.co.uk
 01925 611560

