











 Book size

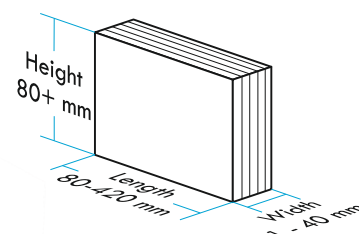

 Cover size

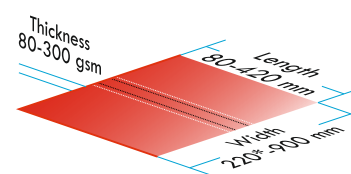

\*Depends on machine specification.



## Standard features:

- Unique closed PUR system including gear pump for precise glue application (PUR spine and side gluing) (tank capacity: 3 kgs)
- Adjustable glue cut-off from the touch screen
- Adjustable book positioning from the touch screen (max. 10 mm)
- Fix milling depth (0.3 mm) and notching
- Tilttable milling unit
- Adjustable cover thickness
- Large cover holder, with skew adjustment
- Paper dust extractor
- Cover sensor
- 1~230V

## Available options for this model:

- Magnetic bookblock support
- Sideshelf
- Tape binding
- Automatic carriage start
- Glue level indication
- Remote service support, Industry 4.0 ready

### Important:

Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately.

SPECIFICATIONS	LAMIBIND LONG PUR
DIMENSIONS OF THE MACHINE (L X W X H MM) / INC. LARGE COVER HOLDER	1870x1050x1345
PACKAGE OF THE MACHINE (L X W X H MM)	2030x1270x1545
NET WEIGHT (KG) - SZ	420
GROSS WEIGHT (KG) - SZ	520
POWER SUPPLY (ELECTIVE)	1~230 V-50 Hz / 200 - 220 V-60 Hz
NOMINAL CURRENT (A)	14 / 16
CAPACITY (kW)	3
COMPRESSED AIR SUPPLY (BAR)	6
LENGHT OF THE BOUND DOCUMENT (MM/INCH)	80-420
THICKNESS OF THE BOUND DOCUMENT (MM/INCH)	1-50
THEORETICAL NUMBER OF WORKING CYCLES (FWD-BWD/HOUR) * THE ABOVE VALUE IS THEORETICAL NUMBER OF THE WORKING CYCLES. THE REAL SPEED AND QUANTITY OF BOOKS CAN BE BOUND ON THE MACHINE DEPENDS ON THE STRENGHT FEATURES OF THE FLUE USED ON THE MACHINE, THE NECESSARY BINDING/NIPPING TIME, THE THICKNESS OF THE DOCUMENT TO BE BOUND, DEOENDS ON THE SKILL AND QUICKNESS OF THE MACHINE OPERATOR, AND THE SELECTED BINDING TECHNOLOGY.	450*
ADJUSTMENT OF THE BINDING TIME OF THE DOCUMENT	1-99
BINDING CYCLE COUNTER	YES
<b>MILLING UNIT</b>	
SPINE PREPERATION	FIXED MILLING & NOTCHING
<b>GLUING UNIT</b>	
HEAT-UP TIME (MINUTE)	20-25
TEMPERATURE RANGE OF THE MELTING OF THE GLUE (C/F)	100-200
VOLUME OF THE CLOSED PUR GLUE CONTAINER	3 KG
ADJUSTABLE LENGTH REGULATION OF THE GLUE APPLICATION (GLUE CUT OFF)	YES
ADJUSTMENT OF THE PUR GLUE VOLUME	PUR PUMP
ADJUSTMENT OF THE HEIGHT OF THE PUR NOZZLE	YES
PUR HEATING ZONES	4
STANDBY MODE	YES
<b>BINDING UNIT</b>	
POSSIBILITY TO ADJUST THE POSITION OF THE BOOK BLOCK OVER THE BINDING UNIT	YES
COVER SENSOR	YES
<b>OTHER FUNCTIONS</b>	
PAPER DUST EXTRACTION	YES
USER INTERFACE	TOUCH SCREEN
OPERATING SOFTWARE	RIGO
SOFTWARE UPDATE	YES
ONLINE REMOTE CONTROL	OPTION
<b>OPTIONS</b>	
AUTOMATIC START OF THE CARRIAGE CLAMP	OPTION
GLUE LEVEL INDICATION FOR PUR	OPTION
TAPE BINDING	OPTION
SIDE SHELF	OPTION
MAGNETIC BOOK HOLDER	OPTION
REMOTE SERVICE SUPPORT, INDUSTRY 4.0 READY	OPTION



**RIGO Szerszám- és Formakészítő Kft.**  
 Gesztenye sor 1., 5435, Martfű, Hungary  
[rigokft@rigokft.hu](mailto:rigokft@rigokft.hu)  
[www.rigokft.hu](http://www.rigokft.hu)  
 +36 56 580 031

Important: Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately. The images featured in this guide are for illustrative purposes only. The manufacturer is not liable for any printing mistake.