












 Book size

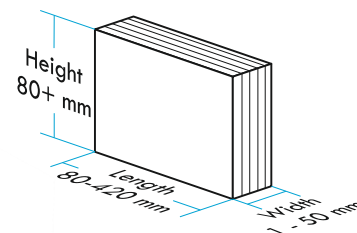

 Cover size



\*Depends on machine specification.



## Standard features:

- Unique closed PUR system including gear pump for precise glue application (PUR spine and side gluing) (tank capacity: 3 kgs)
- Adjustable glue cut-off from the touch screen
- Adjustable book positioning from the touch screen (max. 10 mm)
- Adjustable milling depth via touch screen (0 - 3 mm) and notching
- Tiltable milling unit
- Adjustable cover thickness
- Large cover holder, with skew adjustment
- Paper dust extractor
- Cover sensor
- 3~400V

## Available options for this model:

- Magnetic bookblock support
- Sideshelf
- Tape binding
- Automatic carriage start
- Glue level indication
- Remote service support, Industry 4.0 ready

### Important:

Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately.

|  |   |
|--|---|
| SPECIFICATIONS   | MILLBIND PUR                                    |
| DIMENSIONS OF THE MACHINE (L X W X H MM) / INC. LARGE COVER HOLDER   | 1890x1050x1345                                  |
| PACKAGE OF THE MACHINE (L X W X H MM)  | 2030x1270x1545                                  |
| NET WEIGHT (KG) - SZ   | 450   |
| GROSS WEIGHT (KG) - SZ   | 550   |
| POWER SUPPLY (ELECTIVE)  | 3~400 V-50 Hz / 1~230 V-50 Hz / 200-220 V-60 Hz |
| NOMINAL CURRENT (A)  | 20 / 32 / 40                                    |
| CAPACITY (KW)  | 5,5   |
| COMPRESSED AIR SUPPLY (BAR)  | 6   |
| LENGHT OF THE BOUND DOCUMENT (MM/INCH)   | 80-420  |
| THICKNESS OF THE BOUND DOCUMENT (MM/INCH)  | 1-50  |
| THEORETICAL NUMBER OF WORKING CYCLES (FWD-BWD/HOUR)<br>* THE ABOVE VALUE IS THEORETICAL NUMBER OF THE WORKING CYCLES. THE REAL SPEED AND QUANTITY OF BOOKS CAN BE BOUND ON THE MACHINE DEPENDS ON THE STRENGHT FEATURES OF THE FLUE USED ON THE MACHINE, THE NECESSARY BINDING/NIPPING TIME, THE THICKNESS OF THE DOCUMENT TO BE BOUND, DEOENDS ON THE SKILL AND QUICKNESS OF THE MACHINE OPERATOR, AND THE SELECTED BINDING TECHNOLOGY. | 450*  |
| ADJUSTMENT OF THE BINDING TIME OF THE DOCUMENT   | 1-99  |
| BINDING CYCLE COUNTER  | Yes   |
| MILLING UNIT   |   |
| SPINE PREPERATION  | MILLING & NOTCHING                              |
| ADJUSTMENT OF THE MILLING HEIGHT (MM)  | ELECTRICALLY 0-3                                |
| GLUING UNIT  |   |
| HEAT-UP TIME (MINUTE)  | 20-25   |
| TEMPERATURE RANGE OF THE MELTING OF THE GLUE (C/F)   | 100-200   |
| VOLUME OF THE CLOSED PUR GLUE CONTAINER  | 3 KG  |
| ADJUSTABLE LENGTH REGULATION OF THE GLUE APPLICATION (GLUE CUT OFF)  | Yes   |
| ADJUSTMENT OF THE PUR GLUE VOLUME  | PUR PUMP  |
| ADJUSTMENT OF THE HEIGHT OF THE PUR NOZZLE   | Yes   |
| PUR HEATING ZONES  | 4   |
| STANDBY MODE   | Yes   |
| BINDING UNIT   |   |
| POSSIBILITY TO ADJUST THE POSITION OF THE BOOK BLOCK OVER THE BINDING UNIT   | Yes   |
| COVER SENSOR   | Yes   |
| LARGE COVER HOLDER   | Yes   |
| OTHER FUNCTIONS  |   |
| PAPER DUST EXTRACTION  | Yes   |
| USER INTERFACE   | TOUCH SCREEN                                    |
| OPERATING SOFTWARE   | RIGO  |
| SOFTWARE UPDATE  | Yes   |
| ONLINE REMOTE CONTROL  | OPTION  |
| OPTIONS  |   |
| AUTOMATIC START OF THE CARRIAGE CLAMP  | OPTION  |
| GLUE LEVEL INDICATION FOR PUR  | OPTION  |
| TAPE BINDING   | OPTION  |
| SIDE SHELF   | OPTION  |
| MAGNETIC BOOK HOLDER   | OPTION  |
| REMOTE SERVICE SUPPORT, INDUSTRY 4.0 READY   | OPTION  |
|  |   |
|  |   |



RIGO Szerszám- és Formakészítő Kft.  
Gesztenye sor 1., 5435, Martfű, Hungary  
rigokft@rigokft.hu  
www.rigokft.hu  
+36 56 580 031

Important: Compressed air is required for the operation of the machine. Automatic water drain system is highly recommended. The compressor has to be purchased separately. The images featured in this guide are for illustrative purposes only. The manufacturer is not liable for any printing mistake.